

(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 917 127 A1

(12)

# EUROPEAN PATENT APPLICATION

published in accordance with Art. 158(3) EPC

(43) Date of publication:

19.05.1999 Bulletin 1999/20

(51) Int. Cl.<sup>6</sup>: G09G 3/30, H05B 33/08,

H05B 33/26, H01L 33/00

(21) Application number: 98902262.9

(86) International application number:

PCT/JP98/00655

(22) Date of filing: 17.02.1998

(87) International publication number:

WO 98/36406 (20.08.1998 Gazette 1998/33)

(84) Designated Contracting States:

DE FR GB NL

(30) Priority: 17.02.1997 JP 32474/97

19.03.1997 JP 66046/97

(71) Applicant:

SEIKO EPSON CORPORATION

Shinjuku-ku, Tokyo 163-0811 (JP)

(72) Inventors:

• KIMURA, Mutsumi,  
Selko Epson Corporation  
Nagano-ken 392-8502 (JP)

• ITOH, Tomoyuki,  
Selko Epson Corporation  
Nagano-ken 392-8502 (JP)

(74) Representative:


Sturt, Clifford Mark et al  
Miller Sturt Kenyon  
9 John Street  
London WC1N 2ES (GB)

## (54) CURRENT-DRIVEN EMISSIVE DISPLAY DEVICE AND METHOD FOR MANUFACTURING THE SAME

(57) An organic EL device driven by thin-film transistors is disclosed, wherein for suppressing the deterioration with time of thin-film transistors, at least one of the thin-film transistors, or a second thin-film transistor is formed of a p-channel type thin-film transistor. The p-

channel type thin-film transistor is preferably formed in the same step of process as the thin-film transistors in built-in drive circuits.

FIG. 7

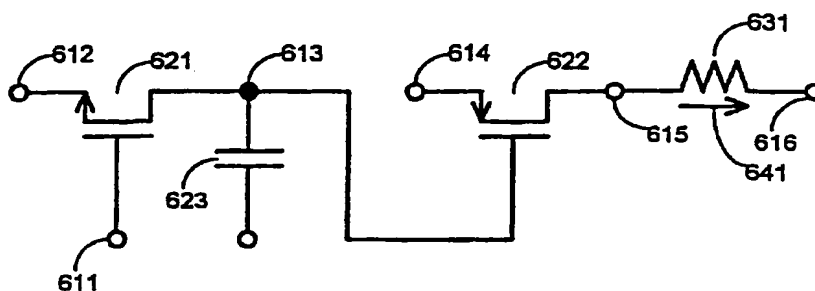

EP 0 917 127 A1

## Description

### Technical Field

[0001] The present invention relates to a display apparatus in which current luminescent devices such as organic electro luminescence (hereinafter referred to as "EL") display devices are driven by using thin-film transistors. More particularly, the invention relates to a current-driven light-emitting display apparatus driven by thin-film transistors, which realizes the suppression of deterioration with time, and to a method of producing the same.

### Background Art

[0002] The inventor of this invention carefully examined organic EL display devices driven by thin-film transistors, and ascertained the following facts.

(1) In an organic EL display device driven by thin-film transistors, since the organic EL display device is a direct-current device, direct current also runs through thin-film transistors, which are connected in series to the EL device, for the purpose of controlling it.

(2) Thin-film transistors are classified into an n-channel type and a p-channel type. These types differ extremely in the manner in which deterioration with time occurs.

[0003] Accordingly, an object of the present invention is to suppress the deterioration with time of thin-film transistors, in a current luminescent device luminescent device driven by means of the thin-film transistors.

### Disclosure of Invention

#### [0004]

(1) In the present invention as set forth in Claim 1, there is provided a current-driven light-emitting display apparatus comprising a plurality of scanning lines and a plurality of data lines, thin-film transistors and current luminescent devices being formed in positions corresponding to each of the intersections of the scanning lines and the data lines, wherein at least one of the thin-film transistors is a p-channel type thin-film transistor.

According to Claim 1, it is possible to suppress the deterioration with time of a thin-film transistor.

(2) In the present invention as recited in Claim 2, there is provided a current-driven light-emitting display apparatus in which a plurality of scanning lines, a plurality of data lines, common electrodes, and opposite electrodes are formed, with first thin-film transistors being formed in positions corresponding to the intersections of the scanning lines and the

data lines, second thin-film transistors, holding capacitors, pixel electrodes, and current luminescent elements, the first thin-film transistors controlling conductivity between the data lines and the holding capacitors by the potentials of the scanning lines, the second thin-film transistors controlling conductivity between the common electrodes and the pixel electrodes by the potentials of the holding capacitors, to thereby control the current which flows through the current luminescent elements provided between the pixel electrodes and the opposite electrodes wherein the second thin-film transistors are p-channel type thin-film transistors.

(3) In the present invention as recited in Claim 3, there is provided a current-driven light-emitting display apparatus according to Claim 1 or Claim 2, further comprising a driving circuit for driving the current luminescent element, the driving circuit is comprised of the plurality of scanning lines, the plurality of data lines, the thin-film transistors, and the current luminescent elements, which are disposed on the substrate together luminescent device, wherein the p-channel type thin-film transistors are formed in the same step of process as the thin-film transistors in the driving circuits.

(4) In the current-driven light-emitting display apparatus according to any one of Claims 1 to 3, the thin-film transistors are polysilicon thin-film transistors.

(5) The invention as recited in Claim 5 provides a current-driven light-emitting display apparatus according to Claim 3, wherein the drive circuits comprises complementary type thin-film transistors, the first thin-film transistors are formed in the same step of process as n-channel type thin-film transistors in the driving circuits, and the second thin-film transistors are formed in the same step of process as the p-channel type thin-film transistors in the driving circuits.

[0005] According to Claim 5, it is possible to provide a current-driven light-emitting display apparatus, which exhibits high performance with no deterioration with time, without increasing the number of steps of process for producing the apparatus.

### Brief Description of the Drawings

#### [0006]

Fig. 1 is a block diagram of the basic structure of a display to which the present invention is applied; Fig. 2 is an equivalent circuit diagram of a display device equipped with thin-film transistors according to a first embodiment of the present invention; Fig. 3 is a drive voltage diagram of the display device equipped with thin-film transistors according to the first embodiment of the present invention;

Fig. 4 is a current-voltage characteristic chart of a current-thin-film transistor according to the first embodiment of the present invention;

Fig. 5 is a current-voltage characteristic chart of an organic EL display device according to the first embodiment of the present invention;

Fig. 6(a) is a sectional view of an organic display EL device equipped with thin-film transistors according to the first embodiment of the invention, and Fig. 6(b) is a plan view of an organic display EL device according to the first embodiment of the present invention;

Fig. 7 is an equivalent circuit diagram of an organic EL display device equipped with thin-film transistors used in a second embodiment of the present invention;

Fig. 8 is a drive-voltage diagram of an organic EL display device equipped with thin-film transistors according to the second embodiment of the present invention;

Fig. 9 is a current-voltage characteristic chart of a current-thin-film transistor according to the second embodiment of the present invention;

Fig. 10 is a current-voltage characteristic chart of an organic EL display device according to the second embodiment of the present invention;

Fig. 11(a) is a sectional view of an organic EL display device equipped with thin-film transistors according to the second embodiment of the present invention, and Fig. 11(b) is a plan view of an organic EL display device equipped with thin-film transistors according to the second embodiment of the present invention;

Fig. 12 is a chart showing the deterioration with time of an n-channel type thin-film transistor;

Fig. 13 is a chart showing the deterioration with time of a p-channel type thin-film transistor; and

Fig. 14 is a flow diagram of the process for producing a thin-film-transistor-drive organic EL display device according to the present invention.

#### [Reference Numerals]

[0007]

111	scanning line	151	resist
112	data line	211	scanning potential
113	common line	212	signal potential
114	holding electrode	213	holding potential
115	pixel electrode formed of Al	214	common potential
116	opposite electrode formed of ITO	215	pixel potential
121	switching thin-film transistor	216	counter potential
122	n-channel type current-thin-film transistor	221	period of display of pixels
123	holding capacitor	222	period of non-display of pixels
131	forward oriented organic EL display device	31	current-voltage characteristic of n-channel type current-thin-film transistor, when drain-voltage is 4V.
132	hole injection layer	32	current-voltage characteristic of n-channel type current-thin-film transistor, when drain-voltage is 8V.
133	organic EL layer	15	4
141	current direction of current luminescent element	4	current-voltage characteristic of forward oriented organic EL display device
		611	scanning line
		612	data line
		20	613
		614	common line
		615	holding electrode
		616	pixel electrode formed of ITO
		621	opposite electrode formed of Al
		25	622
		623	switching thin-film transistor
		631	p-channel type current-thin-film transistor
		632	holding capacitor
		633	reverse oriented organic EL display device
		30	641
		651	hole injection layer
		711	organic EL layer
		712	current direction of current luminescent element
		713	resist
		35	714
		715	scanning potential
		716	signal potential
		721	holding potential
		722	common potential
		40	81
		81	pixel potential
		82	counter potential
		45	9
		511	period of display of pixels
		512	period of non-display of pixels
		521	current-voltage characteristic of p-channel type current-thin-film transistor, when drain voltage is 4V.
		55	522
		522	current-voltage characteristic of p-channel type current-thin-film transistor, when drain voltage is 8V.
			current-voltage characteristic of reverse oriented organic EL display device
			conductivity characteristics of n-channel type thin-film transistor before application of voltage, when $V_d = 4V$ .
			conductivity characteristics of n-channel type thin-film transistor before application of voltage, when $V_d = 8V$ .
			conductivity characteristics of n-channel type thin-film transistor after application of voltage, when $V_d = 4V$ .
			conductivity characteristics of n-channel type thin-film transistor after application of voltage,

when  $V_d = 8V$ .

811 conductivity characteristics of p-channel type  
thin-film transistor before application of voltage,  
when  $V_d = 4V$ .

812 conductivity characteristics of p-channel type  
thin-film transistor before application of voltage,  
when  $V_d = 8V$ .

821 conductivity characteristics of p-channel type  
thin-film transistor after application of voltage,  
when  $V_d = 4V$ .

822 conductivity characteristics of p-channel type  
thin-film transistor after application of voltage,  
when  $V_d = 8V$ .

#### [Best Mode for Carrying Out the Invention]

(The general structure of an organic EL display device)

[0008] Referring to the drawings, the preferred  
embodiments of the present invention will be described.

[0009] As shown in Fig. 1, the center region of a sub-  
strate 1 constitutes a display part. In the outer periphery  
of the transparent substrate 1, at the top side of the  
drawing, a data-side drive circuit 3, which outputs image  
signals to data lines 112, is arranged, and at the left side  
of the drawing, a scanning-side drive circuit 4, which  
outputs scanning signals to scanning lines 111, is  
arranged. In these drive circuits 3 and 4, n-type thin-film  
transistors and p-type thin-film transistors form comple-  
mentary type TFTs. These complementary type thin-  
film transistors are included in shift register circuits,  
level shift circuits, analog switch circuits, etc.

[0010] Arranged on the transparent substrate 1 are a  
plurality of scanning lines 111, and a plurality of data  
lines 112 extending in a direction perpendicular to the  
direction in which the scanning lines extend. The inter-  
sections of these data lines 112 and scanning lines 111  
constitute pixels 7 in the form of a matrix.

[0011] Formed in each of these pixels 7 is a first thin-  
film transistor (hereinafter referred to as "a switching  
thin-film transistor") 121, in which scanning signals are  
supplied to a gate electrode (a first gate electrode)  
through the scanning line 111. One end of the  
source/drain region of the switching thin-film transistor  
121 is electrically connected to a data line 112, while  
the other end of the source/drain region is electrically  
connected to a potential holding electrode 113. In addi-  
tion, a common line 114 is disposed in parallel to the  
scanning line 111. Holding capacitor 123 is formed  
between the common line 114 and the potential holding  
electrode 113. The common line is maintained at a con-  
trolled potential. Accordingly, when the switching thin-  
film transistor 121 is turned ON through the selection by  
a scanning signal, the image signal from the data line  
112 is written to the holding capacitor 123 through the  
switching thin-film transistor.

[0012] The potential holding electrode 113 is electri-  
cally connected to the gate electrode of second thin-film

transistor 122 (hereinafter referred to as "a current-thin-  
film transistor"). The one end of the source/drain region  
of the current-thin-film transistor 122 is electrically con-  
nected to a common line 114, while, the other end of the  
source/drain region is electrically connected to one  
electrode 115 of a luminescent element 131. When the  
current-thin-film transistor 122 is turned ON, the current  
of the common line 114 flows to the luminescent ele-  
ment 131 of such as an organic EL display device  
through the current-thin-film transistor 122, so that the  
luminescent element 131 emits light. Further, although  
one electrode of the holding capacitor is connected to a  
common line 114 in this arrangement, it is also possible  
for it to be connected to a capacity line being provided  
separately, instead of being connected to the common  
line 114. Alternatively, one electrode of the holding  
capacitor may be connected to an adjacent gate line.

(First Embodiment)

[0013] Fig. 2 is an equivalent circuit diagram of an  
organic EL display device equipped with thin-film tran-  
sistors, according to a first embodiment of the present  
invention. Fig. 3 is a drive voltage diagram of an organic  
EL display device with thin-film transistors, according to  
the first embodiment of the present invention. Fig. 4 is a  
current-voltage characteristic diagram of current-thin-  
film transistors, according to the first embodiment of the  
present invention. Fig. 5 is a current-voltage charac-  
teristic chart of an organic EL display device, according  
to the first embodiment of the present invention.

[0014] In Fig. 2, there are shown a scanning line 111,  
a data line 112, a holding electrode 113, a common line  
114, a pixel electrode formed of A1 115, a opposite  
electrode formed of ITO 116, a switching thin-film tran-  
sistor 121, an n-channel type current-thin-film transistor  
122, a holding capacitor 123, an organic EL display ele-  
ment 131 (hereinafter referred to as "a forward oriented  
organic EL display device") which is caused to emit light  
by the current flowing to the pixel electrode 115 from the  
feeding line 116, and the current directions of the  
organic EL display device 131 and 141.

[0015] In Fig. 3, there are shown a scanning potential  
211, a signal potential 212, a holding potential 213, a  
common potential 214, a pixel potential 215, and a  
counter potential 216. In Fig. 3, only a part of each  
potential is shown to illustrate the respective potential  
relationships. The potential of the scanning line 111 cor-  
responds to the scanning potential 211; the potential of  
the data line 112 corresponds to the signal potential  
212; the potential of the holding electrode 113 corre-  
sponds to the holding potential 213; the potential of the  
common line 114 corresponds to the common potential  
214; the potential of the pixel electrode 115 formed of  
A1 corresponds to the pixel potential 215; and the  
potential of the opposite electrode 116 formed of ITO  
(Indium Tin Oxide) corresponds to the counter potential  
216. Fig. 3 shows each signal potential schematically

and partially.

[0016] Numeral 221 indicates a period in which a pixel is in the display-state, wherein current flows into the forward oriented organic EL display element 131, so that it emits light, and numeral 222 indicates a period in which the pixel is in the non-display state, wherein current does not flow into the forward oriented organic EL display element 131, so that it does not emit light.

[0017] Referring to Fig. 4, a curve 31 indicates the current-voltage characteristic of the n-channel type current-thin-film transistor 122 as observed when the drain voltage is 4V, and a curve 32 indicates the current-voltage characteristic of the n-channel type current-thin-film transistor 122 as observed when the drain voltage is 8V. Regarding either drain voltage, the following facts can be seen. When the gate voltage is low, the n-channel type current-thin-film transistor 122 is turned OFF and a small amount of drain current flows demonstrating a high source/drain resistance. When the gate voltage is high, the n-channel type current-thin-film transistor 122 is turned ON and a large amount of drain current flows demonstrating a low source/drain resistance.

[0018] In Fig. 5, numeral 4 indicates the current-voltage characteristic of the forward oriented organic EL display element 131. Here, the voltage represents the counter potential 216 against the pixel potential 215, and the current represents the current which flows to the pixel electrode 115 from the opposite electrode 116. The forward oriented organic EL display element 131 is OFF when the voltage is not higher than a certain threshold voltage; the resistance is high and allows no current to flow, so that the device does not emit light. The device is ON when the voltage is over a certain threshold voltage, and the resistance is low and allows current to flow, so that the device emits light. In this case, the above threshold voltage is approximately 2V.

[0019] The operation of an organic EL display device equipped with the thin-film transistors of this embodiment will be described with reference to Fig. 2, Fig. 3, Fig. 4, and Fig. 5.

[0020] The switching thin-film transistor 121 controls the conductivity between the data line 112 and the holding electrode 113 by means of the potential of the scanning line 111. In other words, the scanning potential 211 controls the conductivity between the signal potential 212 and the holding potential 213. While in this example, the switching thin-film transistor 121 is an n-channel type thin-film transistor, a p-channel type thin-film transistor is also applicable.

[0021] For the period 221 in which the pixel is in the display-state, the signal potential 212 is high, and the holding potential 213 is retained at a high level. For the period 222 in which the pixel is in the non-display state, the signal potential 212 is low, and the holding potential 213 is retained at a low level.

[0022] The n-channel type current-thin-film transistor 122 has the characteristic as shown in Fig. 3 and controls the conductivity between the common line 114 and

the pixel electrode 115 by means of the potential of the holding electrode 113. In other words, the holding potential 213 controls the conductivity between the common potential 214 and the pixel potential 222. For the period 221 in which the pixel is in the display-state, the holding potential 213 is high, so that the common line 114 is electrically connected to the pixel electrode 115. For the period 222 in which the pixel is in the non-display state, the holding potential 213 is low, so that the common line 114 is disconnected from the pixel electrode 115.

[0023] The organic EL display element 131 has the characteristic as shown in Fig. 5. For the period 221 in which the pixel is in the display-state, the current flows between the pixel electrode 115 and the opposite electrode 116, so that the organic EL display element 131 emits light. For the period 222 in which the pixel is in the non-display state, no current flows, so that the device does not emit light.

[0024] Fig. 6(a) is a sectional view of a thin-film transistor organic EL display device (1 pixel) according to an embodiment of the present invention. Fig. 6(b) is a plan view of a thin-film transistor organic EL display device (1 pixel) according to an embodiment of the present invention. The section taken along the line A-A' of Fig. 6(a) corresponds to the section taken along the line A-A' of Fig. 6(b).

[0025] In Fig. 5, numeral 132 indicates a hole injection layer, numeral 133 indicates an organic EL layer, and numeral 151 indicates a resist.

[0026] In this example, the switching thin-film transistor 121 and the n-channel type current-thin-film transistor 122 adopt the structure and the process ordinarily used for a low-temperature polysilicon thin-film transistor, which are used for thin-film transistor liquid crystal display devices, i.e., a top-gate structure and a process conducted in the condition that the maximum temperature is 600°C or less. However, other structures and processes are also applicable.

[0027] The forward oriented organic EL display element 131 is formed by the pixel electrode 115 formed of Al, the opposite electrode 116 formed of ITO, the hole injection layer 132, and the organic EL layer 133. In the forward oriented organic EL display element 131, the direction of current of the organic EL display device, indicated at 141, can be set from the opposite electrode 116 formed of ITO to the pixel electrode 115 formed of Al. Further, the structure of the organic EL display device is not restricted to the one used here. Other structures are also applicable, as long as the direction of current of the organic EL display device, indicated at 141, can be set to the direction from the opposite electrode to pixel electrode.

[0028] Here, the hole injection layer 132 and the organic EL layer 133 are formed by an ink-jet printing method, employing the resist 151 as a separating structure between the pixels, and the opposite electrode 116 formed of ITO is formed by a sputtering method, yet

other methods are also applicable.

[0029] In this embodiment, the common potential 214 is lower than the counter potential 216, and the current-thin-film transistor is the n-channel type current-thin-film transistor 122.

[0030] In the period 221 in which the pixel is in the display-state, the n-channel type current-thin-film transistor 122 is ON. The current which flows through the forward oriented organic EL display element 131, i.e., the ON-current of the n-channel type current-thin-film transistor 122 depends on the gate voltage, as shown in Fig. 3. Here, the term "gate voltage" means the potential difference between the holding potential 213 and the lower one of the common potential 214 and the pixel potential 215. In this embodiment, the common potential 214 is lower than the pixel potential 215, so that the gate voltage indicates the potential difference between the holding potential 213 and the common potential 214. The potential difference can be sufficiently large, so that a sufficiently large amount of ON-current is obtainable. The ON-current of the n-channel type current-thin-film transistor 122 also depends on the drain voltage. However, this does not affect the above situation.

[0031] Conversely, in order to obtain a necessary amount of ON-current, the holding potential 213 can be made lower, and the amplitude of the signal potential 212 and therefore the amplitude of the scanning potential 211 can be decreased. In other words, in the switching thin-film transistor 121 and the n-channel type current-thin-film transistor 122, a decrease in drive voltage can be achieved without entailing any loss in image quality, abnormal operations, or a decrease in the frequency enabling them to operate.

[0032] Further, in the embodiment of the present invention, the signal potential 212 for the pixel to be in the display-state is lower than the counter potential 216.

[0033] As stated above, in the period 221 in which the pixel is in the display-state, the ON-current of the n-channel type current-thin-film transistor 122 depends on the potential difference between the holding potential 213 and the common potential 214, but not directly on the potential difference between the holding potential 213 and the counter potential 216. Thus, the holding potential 213, i.e., the signal potential 212 for the pixel to be in the display-state, can be made lower than the counter potential 216, and therefore, the amplitude of the signal potential 212 and the amplitude of the scanning potential 211 can be decreased, while retaining a sufficiently large ON-current in the n-channel type current-thin-film transistor 122. That is, in the switching thin-film transistor 121 and the n-channel type current-thin-film transistor 122, a decrease in drive voltage can be accomplished without entailing any loss in image quality, abnormal operations, and a decrease in the frequency enabling them to operate.

[0034] Moreover, in this embodiment, the signal potential 212 for the pixel to be in the non-display-state is higher than the common potential 214.

[0035] In the period 222 in which the pixel is in the non-display-state, when the signal potential 212 becomes slightly higher than the common potential 214, the n-channel type current-thin-film transistor 122 is not completely turned OFF. However, the source/drain resistance of the n-channel type current-thin-film transistor 122 becomes considerably higher, as shown in Fig. 3. Thus, the pixel potential 215, which is determined by dividing the common potential 214 and the counter potential 216 by the values of the resistance of the n-channel type current-thin-film transistor 122 and the resistance of the forward oriented organic EL display element 131, becomes a potential close to the counter potential 216.

[0036] The voltage which is applied to the forward oriented organic EL display element 131 is the potential difference between the pixel potential 215 and the counter potential 216. As shown in Fig. 5, the forward oriented organic EL display element 131 is turned OFF when the voltage is not higher than a certain threshold voltage, when no current flows, so that the display device does not emit light. Namely, the utilization of a threshold potential of the forward oriented organic EL display element 131 makes it possible for the forward oriented organic EL display element 131 not to emit light, even if the signal potential 212 is slightly higher than the common potential 214, and the n-channel type current-thin-film transistor 122 is not completely turned OFF.

[0037] Here, the amplitude of the signal potential 212, and therefore the amplitude of the scanning potential 211 can be decreased by making the signal potential 212 for the pixel to be in the non-display state higher than the common potential 214. In other words, with regard to the switching thin-film transistor 121 and the n-channel type current-thin-film transistor 122, a decrease in drive potential can be accomplished without entailing any loss of image quality, abnormal operations, or a decrease in the frequency enabling them to operate.

[0038] The operation of an organic EL display device equipped with the thin-film transistors of this embodiment is not as simple as described above; it operates under a more complicated relationship between voltage and current. However, the description above holds true approximately and qualitatively.

(Second Embodiment)

[0039] Fig. 7 is an equivalent circuit diagram of an organic EL display device equipped with thin-film transistors, according to the second embodiment of the present invention. Fig. 8 is a drive voltage diagram of the organic EL display device with thin-film transistors, according to the second embodiment of the present invention. Fig. 9 is a current-voltage characteristic chart of a current-thin-film transistor, according to the second embodiment of the present invention. Fig. 10 is a cur-

rent-voltage characteristic chart of the organic EL display device according to the second embodiment of the present invention.

[0040] In Fig. 7, there are shown a pixel electrode formed of ITO 615, a opposite electrode formed of Al 616, a p-channel type current-thin-film transistor 622, and an organic EL display device 631 (hereinafter referred to as "a reverse oriented organic EL display device"), which is caused to emit light by the current flowing to the feeding line 616 from the pixel electrode 615. Numeral 641 indicates the direction of the current of the organic EL display device. This direction is the reverse of that shown in Fig. 2. Except for this, this embodiment is the same as the above first embodiment shown in Fig. 1.

[0041] Fig. 8 is the same as Fig. 3, except that the level of each potential is different from that of Fig. 3.

[0042] In Fig. 9, a curve 81 indicates a current-voltage characteristic of a p-channel type current-thin-film transistor 622 as observed when the drain voltage is 4V. A curve 82 indicates a current-voltage characteristic of the p-channel type current-thin-film transistor 622 as observed when the drain voltage is 8V.

[0043] In Fig. 10, a curve 9 indicates a current-voltage characteristic of a reverse oriented organic EL display device 631.

[0044] The organic EL display device equipped with the thin-film transistors of this embodiment operates in the same way as that of the first embodiment, except that the potential relationship regarding the current-thin-film transistor is reversed due to the fact that the current-thin-film transistor is the p-channel type thin-film transistor 622.

[0045] Fig. 11(a) is a sectional view of an organic EL display device (1 pixel) equipped with the thin-film transistors, according to the second embodiment of the present invention. Fig. 11(b) is a plan view of a thin-film transistor organic EL display device (1 pixel), according to the embodiment of the present invention. The section taken along the line A-A' of Fig. 11(a) corresponds to the section taken along the line A-A' of Fig. 10(b).

[0046] Fig. 11 is the same as Fig. 6, except that it shows a hole injection layer 632 and an organic EL layer 633.

[0047] The reverse oriented organic EL display device 631 is formed by means of the pixel electrode 615 formed of ITO, the opposite electrode 616 formed of Al, the hole injection layer 632, and the organic EL layer 633. In the reverse oriented organic EL display device 631, the direction of current of the organic EL display device, indicated at 641, can be set to the direction from the pixel electrode 615 formed of ITO to the opposite electrode 616 formed of Al.

[0048] In this embodiment, a common potential 714 is higher than a counter potential 716. Further, the current-thin-film transistor is the p-channel type current-thin-film transistor 622.

[0049] In this embodiment, a signal potential 712 for

the pixel to be in the display-state is higher than the counter potential 716.

[0050] Furthermore, in this embodiment, the signal potential 712 for the pixel to be in the non-display-state is lower than the common potential 714.

[0051] All of the effects of the thin-film transistor organic EL display device of this embodiment are also the same as those of the first embodiment, except that the potential relationship regarding the current-thin-film transistor is reversed due to the fact that the current-thin-film transistor is the p-channel type thin-film transistor 622.

[0052] In this embodiment, the current-thin-film transistor 622 is a p-channel type thin-film transistor. This arrangement enables the deterioration with time of the current-thin-film transistor 622 to significantly decrease. Furthermore, the arrangement adopting a p-channel type polysilicon thin-film transistor enables the deterioration with time of the current-thin-film transistor 622 to decrease even further.

[0053] Fig. 14 is a diagram of a process of producing the current-driven light-emitting display apparatus equipped with the thin-film transistors, according to the modification of the first embodiment of the present invention described above.

[0054] As shown in Fig. 14(a), an amorphous silicon layer with a thickness of 200 to 600 angstroms is deposited all over a substrate 1, and the amorphous silicon layer is poly-crystallized by laser annealing etc., to form a polycrystalline silicon layer. After this, patterning is performed on the polycrystalline silicon layer to form a silicon thin-film 421, which serves as a source/drain channel region of the switching thin-film transistor 121, a first electrode 423 of the storage capacitor 123, and a silicon thin-film 422, which serves as a source/drain channel region of the current-thin-film transistor 122. Next, an insulation film 424, which serves as a gate insulation film, is formed over the silicon thin-films 421, 422, and the first electrode 423. Then, implantation of phosphorous (P) ions is selectively effected on the first electrode 423 to lower the resistance thereof. Next, as shown in Fig. 14(b), gate electrodes 111 and 111', which consist of TaN layers, are formed on the silicon thin-films 421 and 422 through the intermediation of the gate insulation film. Next, a resist mask 42 is formed on the silicon layer 422 serving as a current-thin-film transistor, and phosphorous (P) ions are implanted through self-alignment using the gate electrode as a mask to form an n-type source/drain region in the silicon layer 421. Subsequently, as shown in Fig. 14(c), a resist mask 412' is formed on the first silicon layer 421 and the first electrode, and boron (B) is ion-implanted in the silicon layer 422 through self-alignment using the gate electrode 111' as a mask to form a p-type source/drain region in the silicon layer 422. In this way, an n-channel type impurity doping 411 allows the switching thin-film transistor 121 to be formed. At this time, the current-thin-film transistor 122 is protected by the resist mask

42, so that the n-channel type impurity doping 411 is not performed. Then, a p-channel type impurity doping 412 allows the current-thin-film transistor 122 to be formed.

[0055] Further, though not illustrated, in a case in which a shift register of a drive circuit section which drives the switching transistor 121, and a thin-film transistor constituting a sample hold circuit etc., are to be formed on the same substrate, it is possible to form them simultaneously in the same step of process as has been described above.

[0056] A second electrode 425 of the storage capacitor may be formed together with the gate electrodes 111 and 111' simultaneously, either of the same or different materials.

[0057] As shown in Fig. 14(d), after the formation of an inter-layer insulation film 43 and, then, contact holes, electrode layers formed of 426, 427, 428 and 429 of aluminum, ITO or the like are formed.

[0058] Next, after an inter-layer insulation film 44 is formed and flattened, contact holes are formed; then, ITO 45 is formed with a thickness of 1000 to 2000 angstroms, preferably about 1600 angstroms, in such a manner that one electrode of the current-thin-film transistor is connected thereto. For each pixel region, bank layers 46 and 47, which are not less than 2.0  $\mu\text{m}$  in width, are defined. Next, an organic EL layer 48 is formed by an ink-jet method etc., in the region surrounded by the bank layers 46 and 47. After the organic EL 48 is formed, an aluminum-lithium layer with a thickness of 6000 to 8000 angstroms is deposited as a opposite electrode 49 on the organic EL layer 48. Between the organic EL 48 and the opposite electrode 49, a hole injection layer may be disposed, as shown in Fig. 6.

[0059] The process mentioned above enables an organic EL display device driven by means of a high-performance thin-film transistor to be formed. Since polysilicon is much higher in the mobility of carriers than amorphous-silicon, a rapid operation is possible.

[0060] In particular, in this embodiment, when the p-type current-thin-film transistor 122 and the n-type switching thin-film transistor 121 are formed, it is possible to form both of n-type and p-type thin-film transistors, which are complementary type thin-film transistors constituting a shift register of a drive circuit, a sample hold circuit and the like, simultaneously and according to the above mentioned embodiment. The arrangement makes it possible to realize a construction capable of decreasing the deterioration with time of the current-thin-film transistor 122, without increasing the number of production steps.

[0061] As described above, in the first embodiment, an n-channel type current-thin-film transistor is used, and, in the second embodiment, a p-channel type current-thin-film transistor is used. Here, the deterioration with time of p-channel and n-channel type thin-film transistors will be examined.

[0062] Fig. 12 and Fig. 13 are charts showing respectively the deterioration with time of n-channel type and

p-channel type thin-film transistors, especially of polysilicon thin-film transistors, under equivalent voltage application conditions. Numerals 511 and 512 of Fig. 12 indicate the conductivity characteristics of an n-channel type thin-film transistor, in the cases in which  $V_d = 4V$  and in which  $V_d = 8V$ , respectively, before voltage application. Numerals 521 and 522 indicate the conductivity characteristics of an n-channel type thin-film transistor, in the cases in which  $V_g = 0V$  and  $V_d = 15V$  and in which  $V_g = 4V$  and  $V_d = 8V$ , respectively, after voltage application of approximately 1000 seconds. Numerals 811 and 812 of Fig. 13 indicate the conductivity characteristics of a p-channel type thin-film transistor in the cases in which  $V_d = 4V$ , and in which  $V_d = 8V$ , respectively, before voltage application. Numerals 821 and 822 indicate the conductivity characteristics of a p-channel type thin-film transistor in the cases in which  $V_g = 0V$  and  $V_d = 15V$ , and in which  $V_g = 4V$  and  $V_d = 8V$ , respectively, after voltage application for approximately 1000 seconds. It can be seen that in the p-channel type thin-film transistor, the decrease of ON-current and the increase of OFF-current are smaller than in the n-channel type.

[0063] Taking into consideration the difference in the deterioration-with-time characteristic between the p-type and the n-type thin-film transistors as shown in Fig. 12 and Fig. 13 respectively, at least either a switching thin-film transistor or a current-thin-film transistor is formed of a p-channel type thin-film transistor, especially a p-type polysilicon thin-film transistor, whereby the deterioration with time can be suppressed. Further, by forming the switching thin-film transistor as well as the current-thin-film transistor of a p-type thin-film transistor, it is possible to maintain the characteristics of the display device.

[0064] While an organic EL display device is used as the luminescent device in the embodiment described above, this should not be construed restrictively, yet, it is needless to say that an inorganic EL display device or other current-driven luminescent devices are also applicable.

#### [Industrial Applicability]

[0065] The display apparatus according to the present invention can be used as a display apparatus equipped with a current-driven luminescent device such as an organic EL display device or an inorganic EL display device, and a switching device to drive the luminescent device, such as a thin-film transistor.

#### Claims

1. A current-driven light-emitting display apparatus, comprising a plurality of scanning lines, a plurality of data lines, thin-film transistors connected to each of said scanning lines and each of said data lines, and current luminescent elements,



wherein at least one of the thin-film transistors is a p-channel type thin-film transistor.

2. A current-driven light-emitting display apparatus, comprising a plurality of scanning lines, a plurality of data lines, common electrodes, opposite electrodes, first thin-film transistors connected to the scanning lines and the data lines, second thin-film transistors, holding capacitors, pixel electrodes and current luminescent elements,

the first thin-film transistors controlling conduction between the data lines and the holding capacitors by the potentials of the scanning lines, the second thin-film transistors controlling conduction between the common electrodes and the pixel electrodes by the potentials of the holding capacitors, to thereby control the current which flows through the current luminescent elements provided between the pixel electrodes and the opposite electrodes,

wherein the second thin-film transistors are p-channel type thin-film transistors.


3. A current-driven light-emitting display apparatus according to Claim 1 or Claim 2, further comprising a driving circuit for driving the current luminescent elements with, the plurality of scanning lines, the plurality of data lines, the thin-film transistors and the current luminescent elements on a substrate,

wherein the p-channel type thin-film transistors are formed in the same step of process as the thin-film transistors in the driving circuits.

4. A current-driven light-emitting display apparatus according to any one of Claims 1 to 3, wherein the thin-film transistors are polysilicon thin-film transistors.

5. A method of producing a current-driven light-emitting display apparatus according to Claim 3, wherein the drive circuits comprises complementary type thin-film transistors, the first thin-film transistors are formed in the same step of process as the n-channel type thin-film transistors in the drive circuits, and the second thin-film transistors are formed in the same step of process as the p-channel type thin-film transistors in the drive circuits.

FIG. 1

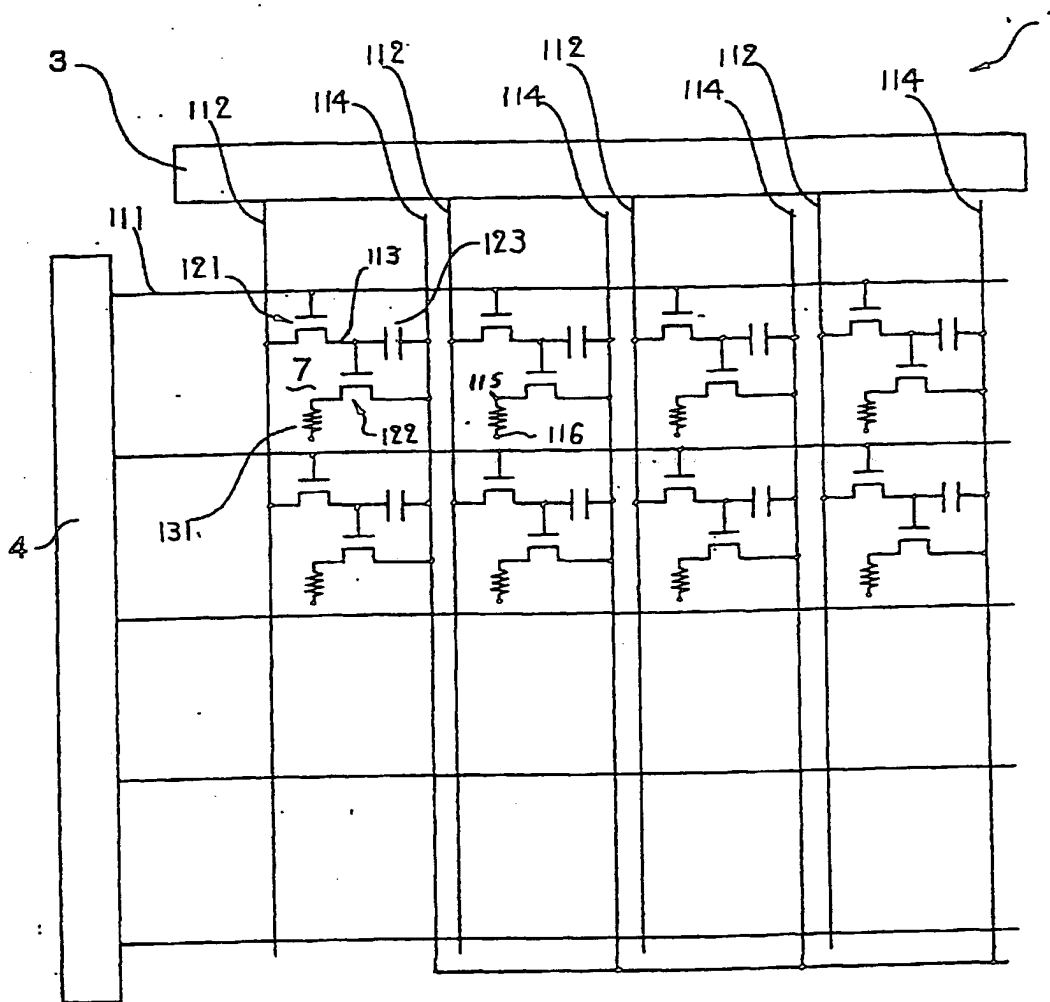

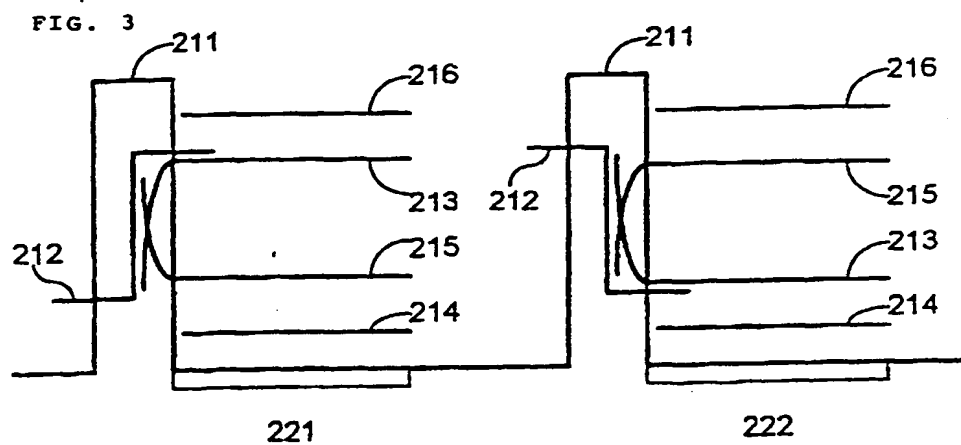
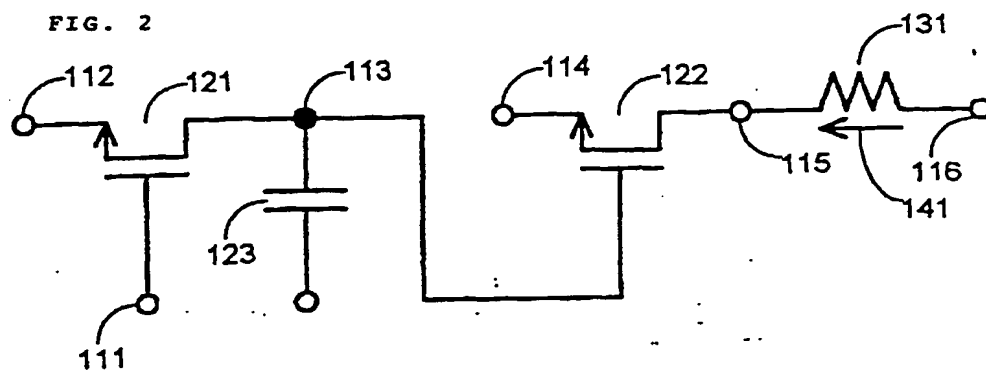


FIG. 4 CURRENT-VOLTAGE CHARACTERISTIC OF N-CHANNEL  
TYPE THIN-FILM TRANSISTOR

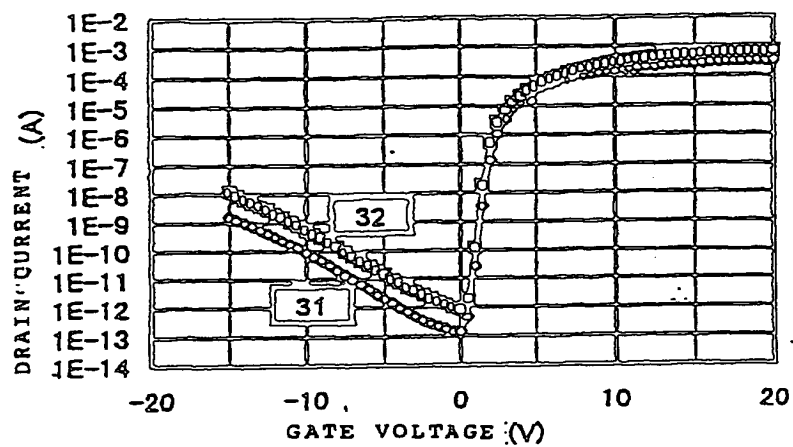


FIG. 5 CURRENT-VOLTAGE CHARACTERISTIC OF FORWARD  
ORIENTED ORGANIC EL DEVICE


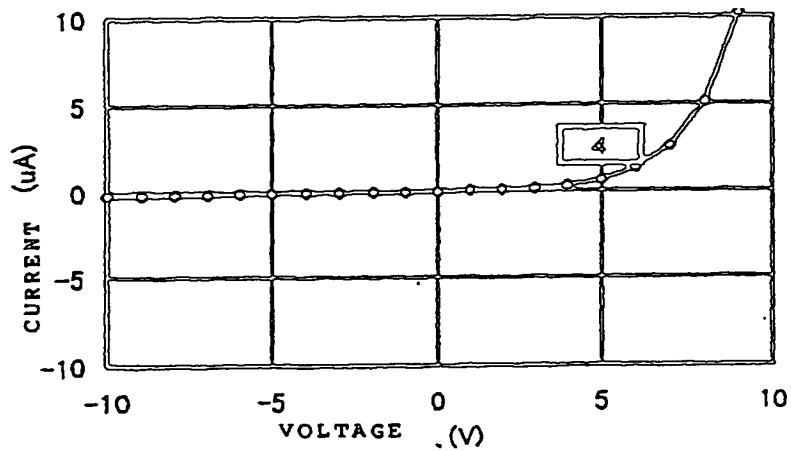


FIG. 6  
(a)

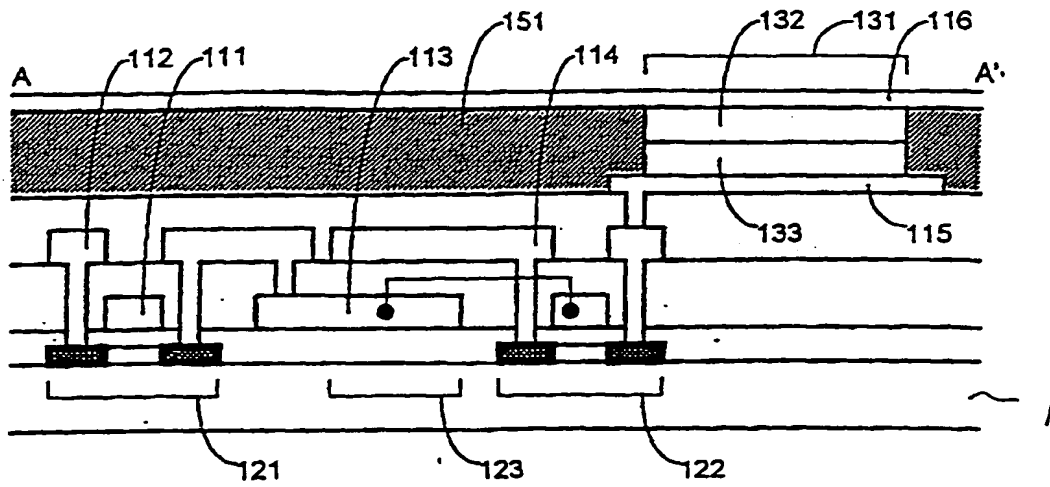

(b)

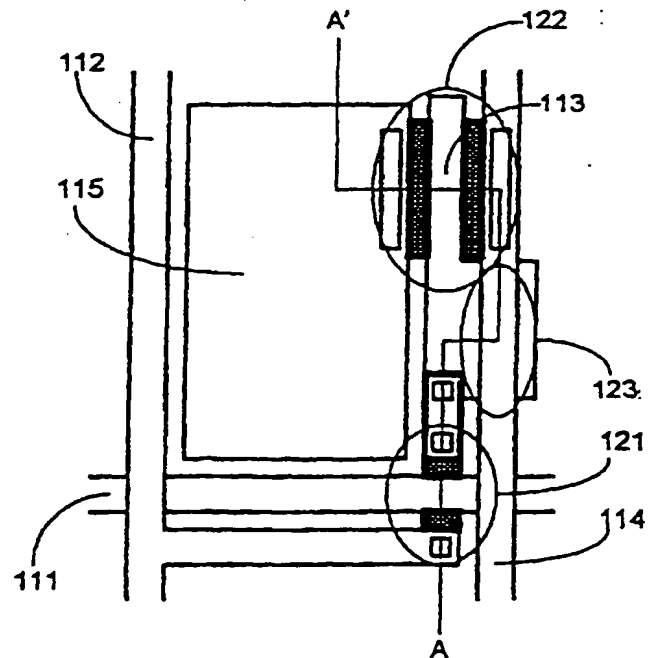


FIG. 7

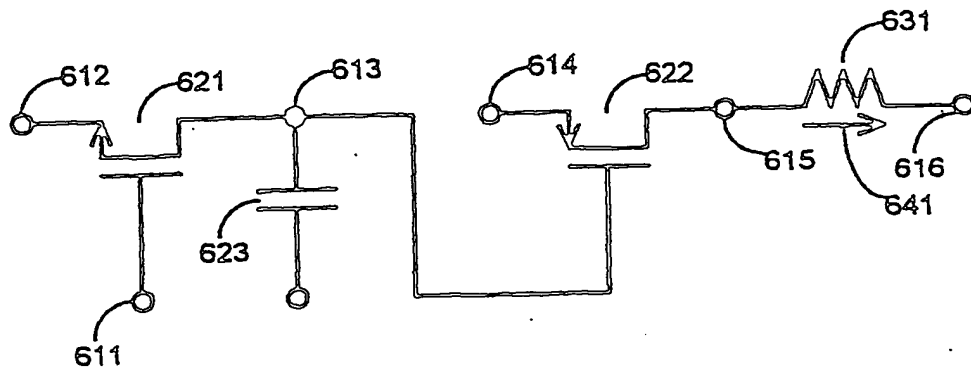


FIG. 8.

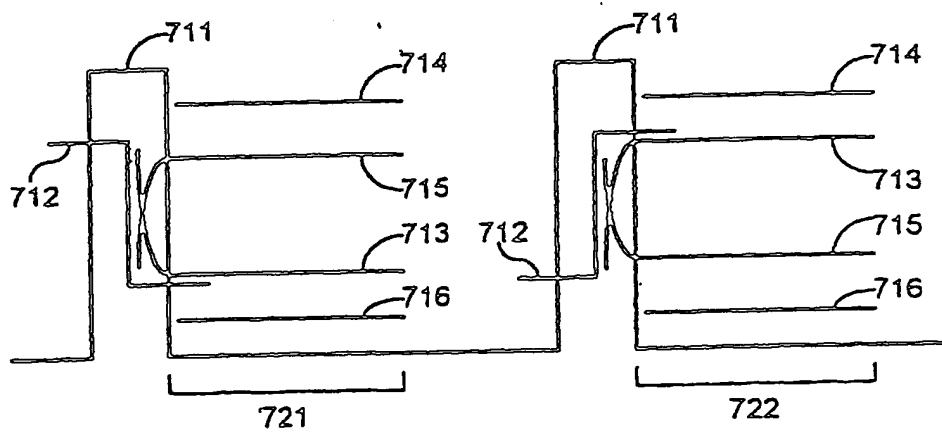


FIG. 9 CURRENT-VOLTAGE CHARACTERISTIC OF P-CHANNEL  
TYPE THIN-FILM TRANSISTOR

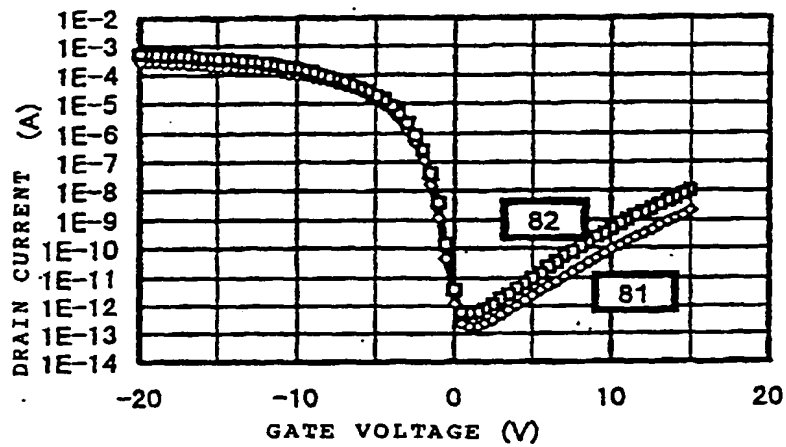
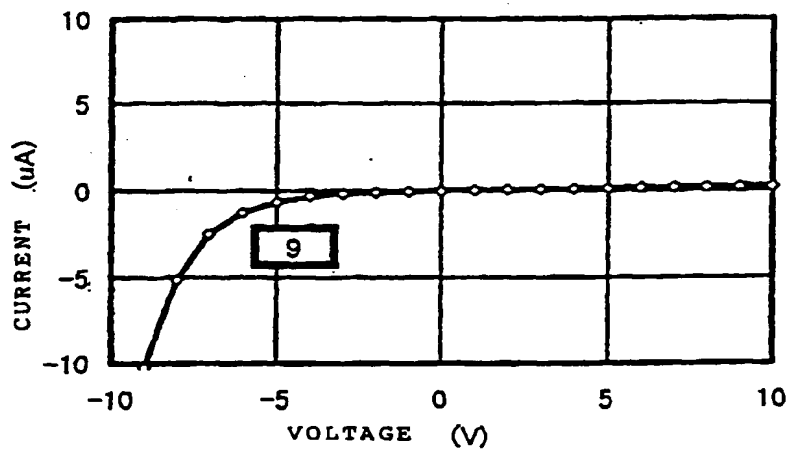


FIG. 10 CURRENT-VOLTAGE CHARACTERISTIC OF REVERSE  
ORIENTED ORGANIC EL DEVICE



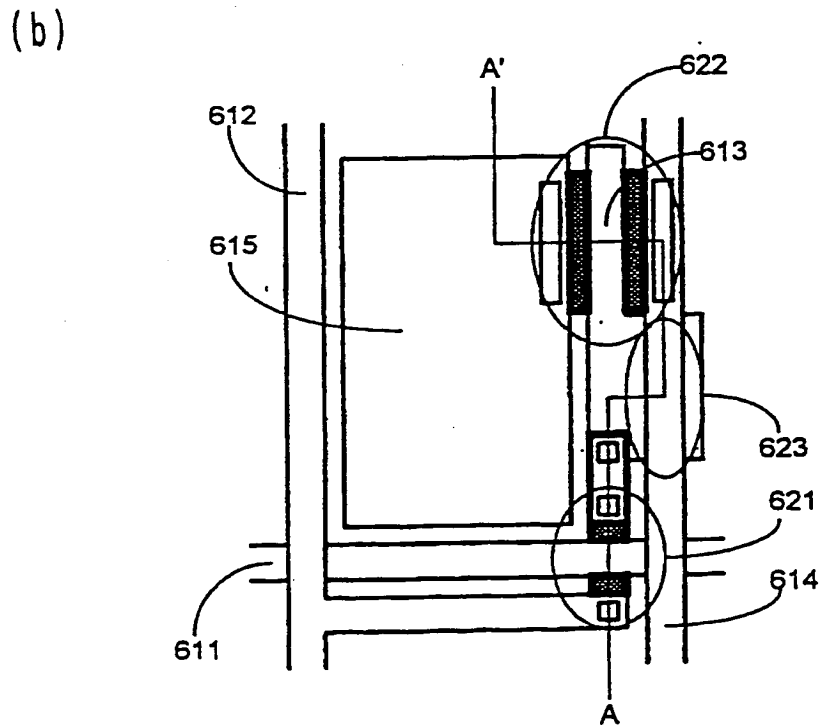
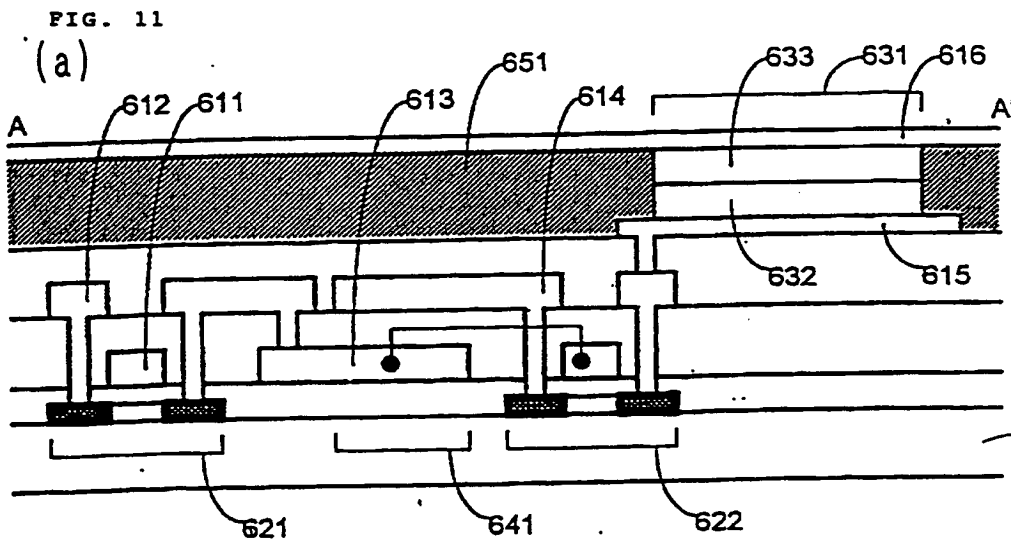




FIG. 12 DEGRADATION WITH TIME OF N-CHANNEL TYPE THIN-FILM TRANSISTOR

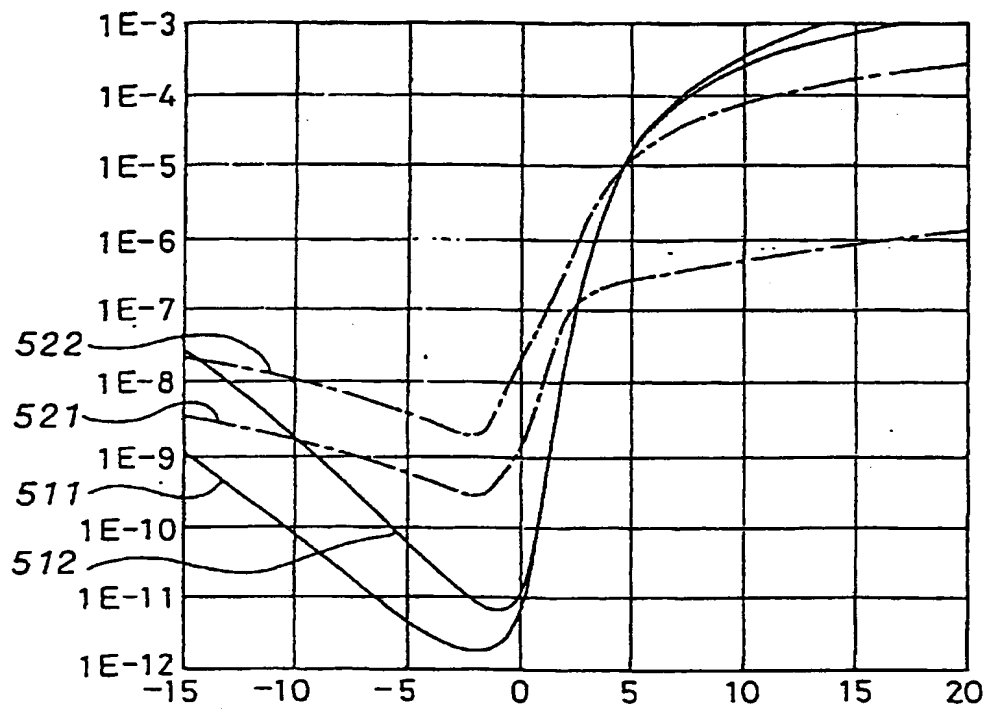


FIG. 13 DEGRADATION WITH TIME OF P-CHANNEL TYPE  
THIN-FILM TRANSISTOR


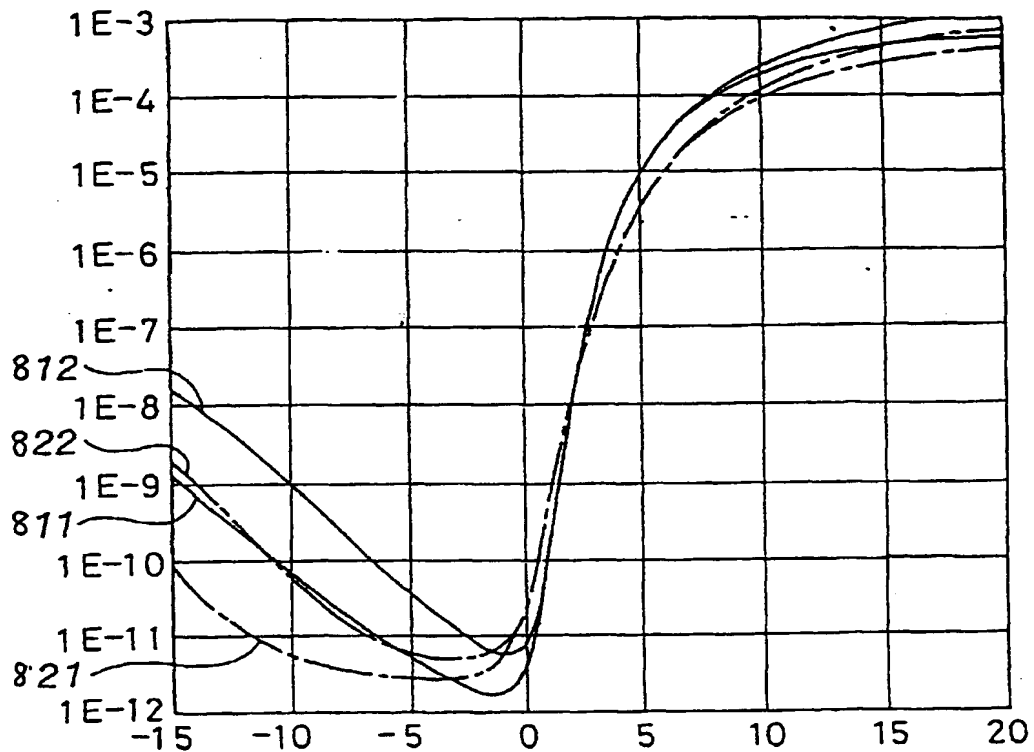


FIG. 14

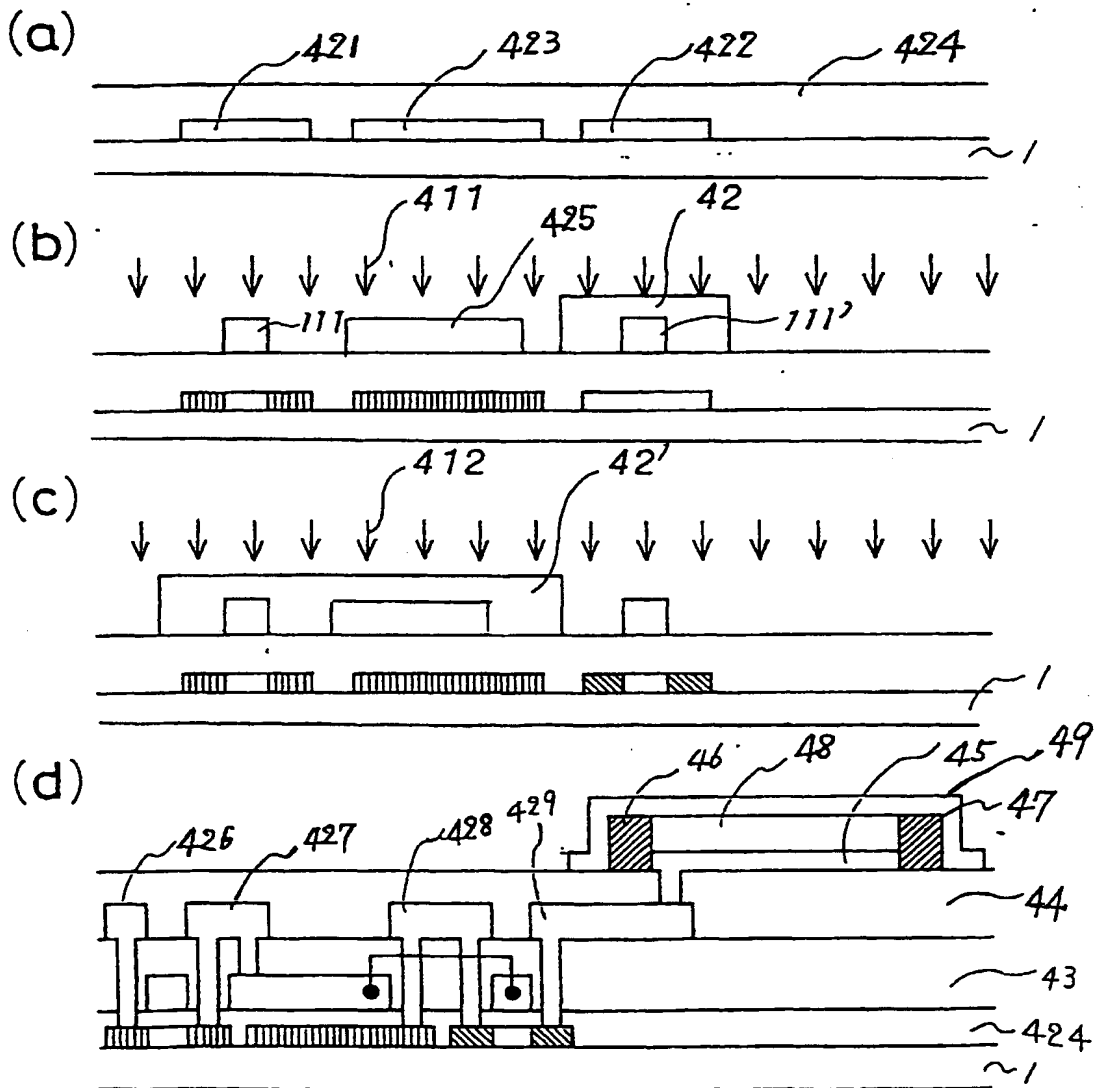

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP98/00655

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> Int.Cl. <sup>6</sup> G09G3/30, H05B33/08, H05B33/26, H01L33/00 According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) Int.Cl. <sup>6</sup> G09G3/20-38, H05B33/00-28, H01L33/00 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1926-1996 Toroku Jitsuyo Shinan Koho 1994-1998 Kokai Jitsuyo Shinan Koho 1971-1995 Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category <sup>a</sup>	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP, 8-129358, A (TDK Corp. and others), May 21, 1996 (21. 05. 96)	1, 2
X	JP, 8-54836, A (NEC Corp.), February 27, 1996 (27. 02. 96)	1
Y	JP, 8-129358, A (TDK Corp. and others), May 21, 1996 (21. 05. 96)	3-5
Y	JP, 5-249916, A (NEC Corp.), September 28, 1993 (28. 09. 93)	5
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
<sup>a</sup> Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document in combination with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search May 12, 1998 (12. 05. 98)		Date of mailing of the international search report May 26, 1998 (26. 05. 98)
Name and mailing address of the ISA/ Japanese Patent Office		Authorized officer
Facsimile No.		Telephone No.

Form PCT/ISA/210(second sheet)(July 1992)